

# SG36/40/50CX-P2

Multi-MPPT String Inverter for 1000 Vdc System

Preliminary



## HIGH YIELD

- DC 15A current input, compatible with over 500W+ PV module
- Dynamic shading optimization mode
- Built-in PID recovery function



## SMART O&M

- Key component diagnosis and protection
- Smart IV Curve Diagnosis
- Grid fault record function, easy for remote O&M



## LOWER INVESTMENT


- Easy to handle thanks to 34% weight reduced
- Plug and Play with Buckle Design




## PROVEN SAFETY

- IP66 protection and C5 Anti-corrosion
- DC Type I+II SPD, AC Type II SPD
- Support AFCI 2.0 function

## CIRCUIT DIAGRAM

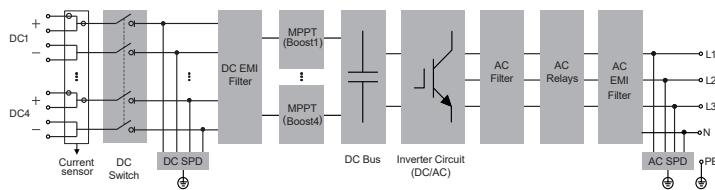

## EFFICIENCY CURVE (SG50CX-P2)

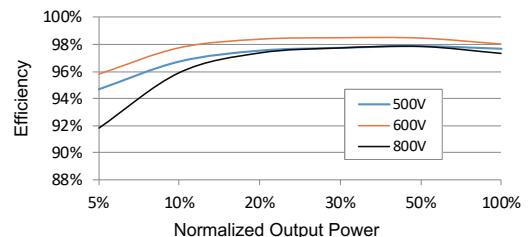

Type designation	SG36CX-P2	SG40CX-P2	SG50CX-P2
<b>Input (DC)</b>			
Max. PV input voltage		1100 V	
Min. PV input voltage / Start-up input voltage		160 V / 200 V	
Rated PV input voltage		600 V	
MPP voltage range		160 V - 1000 V	
MPP voltage range for rated power		500V - 800 V	
No. of independent MPP inputs		4	
Max. number of PV strings per MPPT		2	
Max. PV input current		120 A (30 A / 30 A / 30 A / 30 A)	
Max. DC short-circuit current		160 A (40 A / 40 A / 40 A / 40 A)	
<b>Output (AC)</b>			
Rated AC output power	36 kVA	40 kVA	50 kVA
Max. AC output power	40 kVA	44 kVA	55 kVA
Max. AC output current	60.2 A	66.9 A	83.6 A
Rated AC voltage		3 / N / PE, 220 / 380 V, 230 / 400 V	
AC voltage range		312~480 V	
Rated grid frequency / Grid frequency range		50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
Harmonic (THD)		< 3 % (at rated power)	
Power factor at rated power / Adjustable power factor		> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / connection phases		3 / 3	
<b>Efficiency</b>			
Max. efficiency		98.50%	
Euro. Efficiency		98.30%	
<b>Protection</b>			
Grid monitoring		Yes	
DC reverse connection protection		Yes	
AC short-circuit protection		Yes	
Leakage current protection		Yes	
Surge protection		DC Type I+II / AC Type II	
Ground fault monitoring		Yes	
DC switch		Yes	
PV String current monitoring		Yes	
Arc fault circuit interrupter (AFCI)		Yes	
PID recovery function		Yes	
<b>General Data</b>			
Dimensions (W*H*D)		645*575*245 mm	
Weight	40 kg	40 kg	41 kg
Topology		Transformerless	
Ingress protection rating		IP66	
Corrosivity class		C5	
Night power consumption		< 4W	
Operating ambient temperature range		-30 to 60 °C (> 45 °C derating)	
Allowable relative humidity range (non-condensing)		0 – 100 %	
Cooling method		Smart forced air cooling	
Max. operating altitude		4000 m (> 2000 m derating)	
Display		LED, Bluetooth+APP	
Communication		RS485 / Optional: WLAN, Ethernet	
DC connection type		EVO2 (Max. 6 mm <sup>2</sup> )	
AC connection type		OT terminal (16~35 mm <sup>2</sup> )	
AC Cable specification		Outside diameter 18~38mm	
Grid Compliance		IEC 62109, IEC 61727, IEC 62116	
Grid Support		Q at night function, LVRT, HVRT, active & reactive power control and power ramp rate control	
Country of manufacture		China	

\*: Only compatible with Sungrow logger and iSolarCloud

